




NOTCH

Manufacturing, Inc.



8 BALE TRANSPORTS

Designed for 2000 lbs. bales – 4.5' to 6' diameter. All fabricated components are made with alloy steel, 2-3 times stronger than mild steel. Unique box frame design for maximum strength. Cradles are not connected to each other, only to the main beam, this allows loading to both sides from either side. Unit comes standard with fenders. Tricycle type steering for 90° turning. Fast hitch for quick easy hook up.

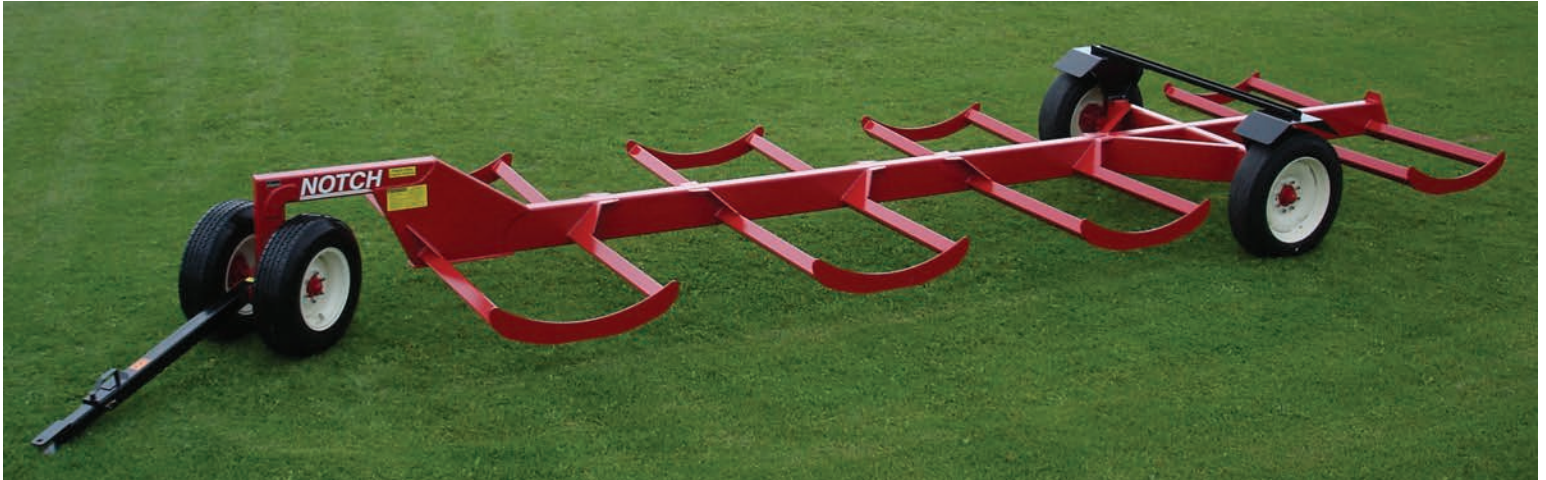

19K 8 BALE TRANSPORT - BT8-19K

Bale Capacity: 19,000 lbs.

Main Beam: 10" x 4" x $\frac{5}{16}$ " tubing

Removable 2 $\frac{1}{4}$ " rear spindles, 8 bolt hubs with grease fittings

Standard front wheels: 16" x 8" x 6, Rear wheels: 22.5" x 8.25" x 8 bolt (Other wheels available)

Front axle design has greasable king pin & bushings, 6 bolt hubs with grease fittings

(pictured with standard fenders)

22K 8 BALE TRANSPORT - BT8-22K

Bale Capacity: 22,000 lbs.

Main Beam: 12" x 6" x $\frac{3}{8}$ " tubing

Removable 2 $\frac{3}{4}$ " rear spindles

All wheels: 22.5" x 8.25" x 8 bolt

Front axle design has greasable king pin & bushings, grease fittings on all hubs



OPTIONAL 2 BALE CRADLE - BT2

Bolt on 2 bale cradle, available on all transports in place of fenders



OPTIONAL LIGHT PACKAGE

Tail lights; running, stop and turn lights

All enclosed in flush mount for protection

OPTIONAL BRAKE PACKAGE Electric Brakes, rear only, with 16" dual wheels (Not pictured)

Notch Manufacturing reserves the right to change its products or their specifications at any time without notice or obligation.

Notch Manufacturing Inc.

23664 State Hwy. 4 • Lake Henry, MN 56362 • 320-243-7248 • Fax: 320-243-7245 • www.notchmfginc.com